



Range of Watertight surface-mounting boards made in polyester material reinforced with fibreglass. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP66 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor and outdoor applications.


GENERAL INFORMATION

Standard	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24	-	MECHANICAL AND FUNCTIONAL CHARACTERISTICS	-
Family	46 QP	IP degree		IP66
Type of door	Transparent door	Mechanical resistance		Bottom IK10
Nominal dim. LxHxD (mm)	800x1060x350	Glow Wire Test		650 °C
Functional dim. LxHxD (mm)	783x1066x350	Thermo-pressure with ball		Cassa 200 °C - Oblò 70 °C
Material	Polyester reinforced with fibreglass	UV resistance		Yes, according to EN 62208
Type of material	Halogen-free in compliance with EN 60754-2		ELECTRICAL CHARACTERISTICS	-
Colour	Grey RAL 7035	Insulation class		II
No. of modules EN 50022	180 (36x5)	Maximum rated insulation voltage (Ui)		690 V
No. locks	2	Insulation voltage	1000 V AC - 1500 V DC (according to EN 62208)	
ACCESSORIES		Dispersible power A (W)		324
Surface-mounting brackets	GW46446-GW46451	Dispersible power B (W)		226
Kit for double insulation restore	GW46526			

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Not resistant	Limited resistance	Resistant	Resistant

DIMENSIONAL

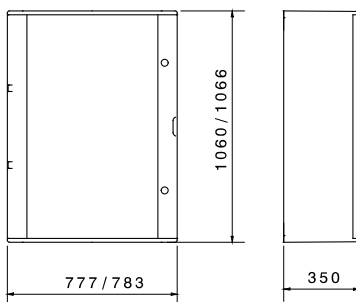

TECHNICAL SYMBOLOGY



IP

IP66

IK

Bottom IK10

GWT

650 °C



Cassa 200 °C - Oblò 70 °C

HF

Halogen-free in compliance with EN 60754-2



II

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polfin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 27/07/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice