Product Data Sheet

GW52258

GW FIT Range




Cable ties, made in PA66, Halogen Free. Available in 13 sizes, from 2.4x75 to 9x914mm. To cmplete the series are available also:: heavy duty wiring ties, re-openable cable ties, cable ties with eyelet and cable ties with plate.

Colour	Black	Dimensions LxH (mm)	4.8x190
Material	Polyamide 66 charged with carbonate	Tensile stress (daN)	18
Terminal grip capacity Ø	4-45 mm	Glow Wire Test	650 °C
Type	Heavy duty	Type of material	Halogen-free in compliance with EN 60754-2
Electrocod	3640	Standard	EN 62775
Fume corrosiveness	< 5%	Flame resistance in compliance with UL 94	V2
Oxygen limit index	29%	Installation temperature	-5 +60 °C
Service temperature range	-40 °C +80 °C (max.peaks 135 °C)		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

DIMENSIONAL

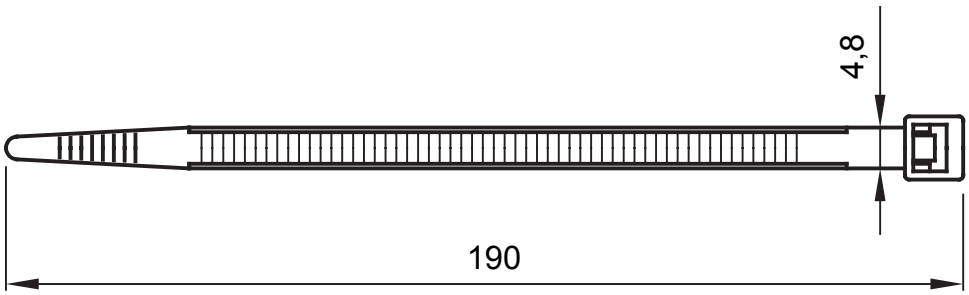

TECHNICAL SYMBOLOGY

GWT
650 °C

HF
HALOGEN FREE
Halogen-free in compliance with EN 60754-2

INSTALLATION
-5°C min
+60°C max
-5 +60 °C

STANDARDS/APPROVALS

CE

Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 13/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice