# Product Data Sheet

# GW52262

GW FIT Range




Cable ties, made in PA66, Halogen Free. Available in 13 sizes, from 2.4x75 to 9x914mm. To cmplete the series are available also:: heavy duty wiring ties, re-openable cable ties, cable ties with eyelet and cable ties with plate.

| | | | |
|---|---|---|---|
| Colour | Black | Dimensions LxH (mm) | 9.0x610 |
| Material | Polyamide 66 charged with carbonate | Tensile stress (daN) | 80 |
| Terminal grip capacity Ø | 11-162 mm | Glow Wire Test | 650 °C |
| Type | Heavy duty | Type of material | Halogen-free in compliance with EN 60754-2 |
| Electrocod | 3640 | Standard | EN 62775 |
| Fume corrosiveness | < 5% | Flame resistance in compliance with UL 94 | V2 |
| Oxygen limit index | 29% | Installation temperature | -5 +60 °C |
| Service temperature range | -40 °C +80 °C (max.peaks 135 °C) | | |

## BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids | | Bases | | Solvents | | | | Mineral oil | UV rays |
|---|---|---|---|---|---|---|---|---|---|---|
| | Concentrated | Diluited | Concentrated | Diluited | Hexane | Benzol | Acetone | Ethyl alcohol | | |
| Resistant | Limited resistance | Limited resistance | Limited resistance | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant |

## DIMENSIONAL

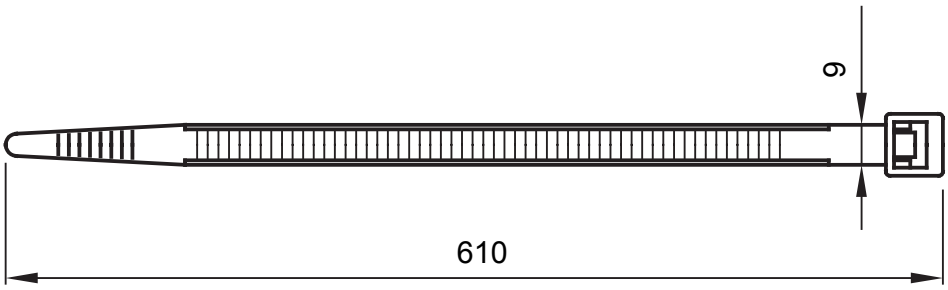


## TECHNICAL SYMBOLOGY

GWT
650 °C

HF HALOGEN FREE
Halogen-free in compliance with EN 60754-2

INSTALLATION -5°C min +60°C max
-5 +60 °C

## STANDARDS/APPROVALS

CE

Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice