




Cable ties, made in PA66, Halogen Free. Available in 13 sizes, from 2.4x75 to 9x914mm. To complete the series are available also: heavy duty wiring ties, re-openable cable ties, cable ties with eyelet and cable ties with plate.

Colour	Black	Dimensions LxH (mm)	7.6x203
Material	Polyamide 66	Tensile stress (daN)	22
Terminal grip capacity Ø	6-46 mm	Glow Wire Test	650 °C
Type	Re-openable	Type of material	Halogen-free in compliance with EN 60754-2
Electrocod	3640	Standard	EN 62775
Fume corrosiveness	< 5%	Flame resistance in compliance with UL 94	V2
Installation temperature	-5 +60 °C	Service temperature range	-40 °C +80 °C (max.peaks 135 °C)

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

#### DIMENSIONAL

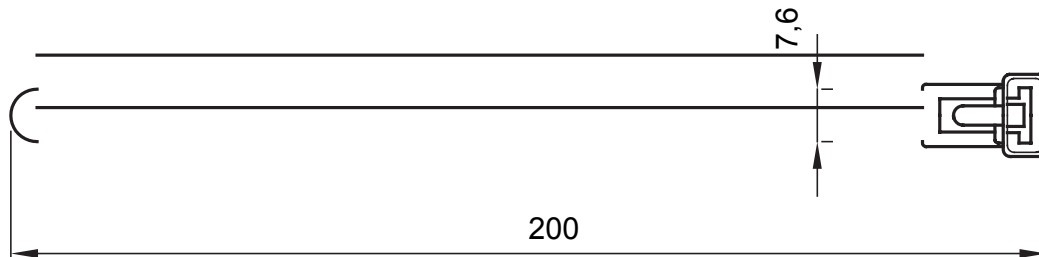

#### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**HF**  
HALOGEN FREE

Halogen-free in compliance with EN 60754-2

**INSTALLATION**  
-5 °C min +80 °C max

-5 +60 °C

#### STANDARDS/APPROVALS

**CE**

Reach Declaration

GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and coordination of Polfin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 26/06/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice