




Top entries	2xØ 37/48	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP55
Mechanical resistance	IK08	Side entries	6xØ 23
Houseable IB socket-outlets	63 A	Electrocod	2221
Minimum installation temperature	-25°C		

### DIMENSIONAL

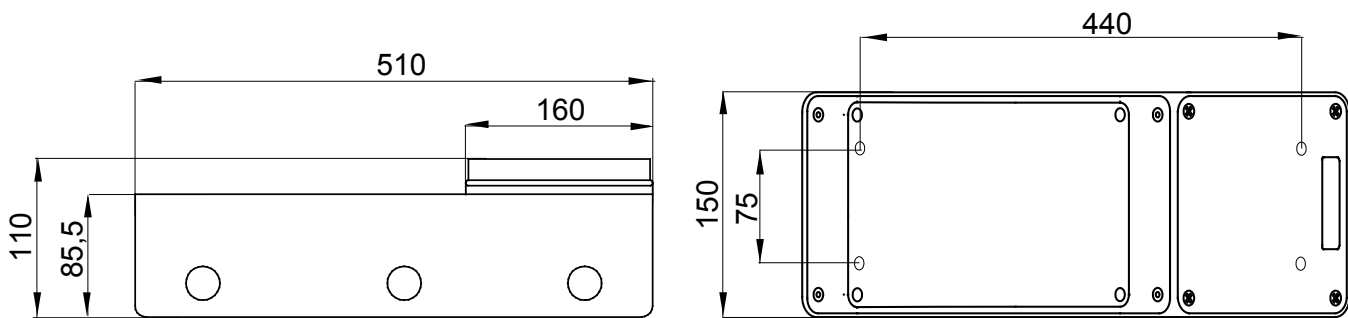

### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP55

**IK**

IK08

### STANDARDS/APPROVALS

