


IP degree	IP66	Mechanical resistance	> IK10
Houseable interloc. socket	3	Houseable IB socket-outlets	16/32 A SELV
Side entries	2xØ 23	Top entries	5xØ 23/29
Bottom entries	1xØ 29/37	Glow Wire Test	850 °C
Suitable for	Heavy duty	Electrocod	2222
Impact resistance at -20 °C	20 J		

### DIMENSIONAL

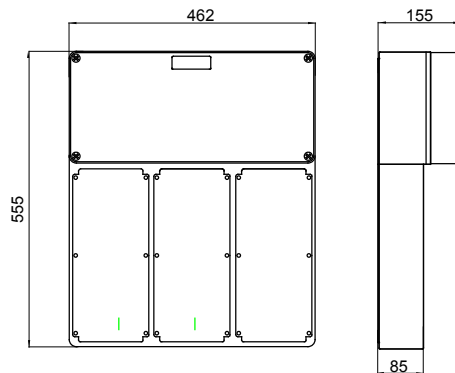

### TECHNICAL SYMBOLOGY

**IP**

IP66

**IK**

> IK10

**GWT**

850 °C

### STANDARDS/APPROVALS

