


| | | | |
|-----------------------------|------------|-----------------------------|-----------|
| IP degree | IP66 | Mechanical resistance | > IK10 |
| Houseable interloc. socket | 1 | Houseable IB socket-outlets | 63 A |
| Side entries | 6xØ 23 | Top entries | 2xØ 37/48 |
| Bottom entries | - | Glow Wire Test | 850 °C |
| Suitable for | Heavy duty | Electrocod | 2222 |
| Impact resistance at -20 °C | 20 J | | |

DIMENSIONAL

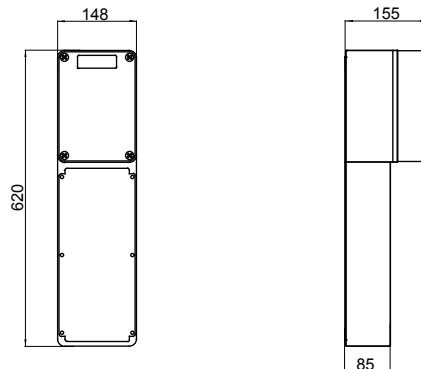

TECHNICAL SYMBOLOGY

IP

IP66

IK

> IK10

GWT

850 °C

STANDARDS/APPROVALS

