




A complete system of IP65 boards for distributing energy in tertiary, commercial sector and building applications, available both empty and pre-wired, in accordance with the international standard EN 61439-3 and EN 61439-4. The distribution boards allow to house flush-mounting and interlocked socket-outlets up to 63A and versions are available with 5, 10, 14 or 20 DIN modules and additional modules 14 and 20 DIN modules in order to increase modular space inside the boards. The switches can always be inspected thanks to the wide transparent door with ergonomic handle and "hinged" screws of the front of board facilitate the wiring and maintenance. Q-DIN are ideally for fixed applications: surface-mounting or pole-mounting, and transportable application: by handle and carrier. To ensure the best possible performance even in outdoor environments, prolonged exposure to the sun and bad weather, the boards are also UV resistant certified in compliance with EN62208.

|                         |                  |                           |                              |
|-------------------------|------------------|---------------------------|------------------------------|
| Colour                  | Grey RAL 7035    | IP degree                 | IP65                         |
| No. of modules EN 50022 | 20               | Houseable socket          | 4 IB Horiz. 16/32 A CBF IP44 |
| Installation type       | Surface-mounting | Dispersible power A (W)   | 30                           |
| Dispersible power B (W) | 92               | Accordance with Standards | EN 62208                     |
| Glow Wire Test          | 650 °C           | Mechanical resistance     | IK08                         |
| Operating temperature   | -25 +40 °C       | Thermo-pressure with ball | 70 °C                        |
| Insulation class        | II               | Version                   | Empty                        |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids              |           | Bases        |           | Solvents           |               |               |                    | Mineral oil        | UV rays            |
|-----------------|--------------------|-----------|--------------|-----------|--------------------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated       | Diluted   | Concentrated | Diluted   | Hexane             | Benzol        | Acetone       | Alcohol            |                    |                    |
| Resistant       | Limited resistance | Resistant | Resistant    | Resistant | Limited resistance | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

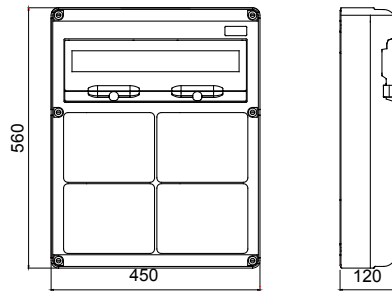

#### TECHNICAL SYMBOLOGY

IP


IP65

GWT

650 °C

IK

IK08



#### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 14/06/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice