



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

#### CARACTERÍSTICAS ELÉCTRICAS

CARACTERÍSTICAS ELÉCTRICAS		- Características funcionales	
Interruptor	Interruptor rotativo	Versión	De cuadro
Corriente nominal (A)	16	Nº mod. EN 50022	4
Nº polos	2P	Campo de regulación	87 - 145 mm
Corriente en AC21A (415V)	16	Tipología	Para emergencia
Corriente en AC22A (415V) (A)	16	Color maneta	Rojo
Corriente en AC23A (415V) (A)	16	Bloqueable	SI (máx. 3 candados en OFF)
Potencia disipada por polo	0,25 W/polo	<b>ACCESORIOS</b>	-
Sección cables	1-10 mm <sup>2</sup>	Tipo accesorios	Máx. 2 contactos auxiliares (1 por lado)

#### DIMENSIONAL

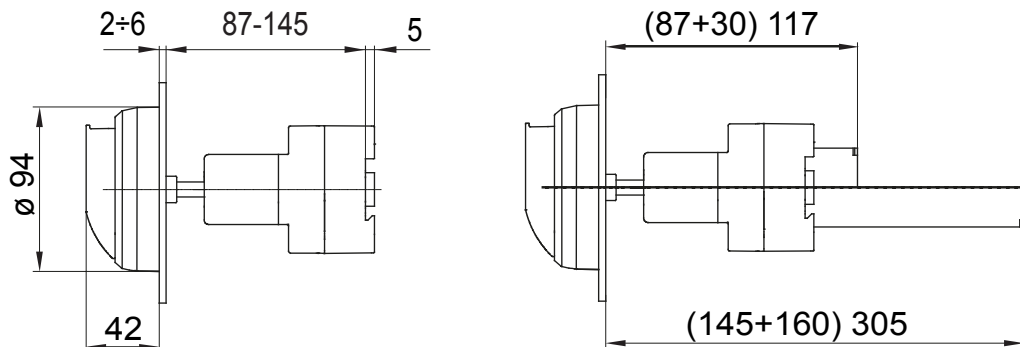

#### MARCAS/APROBACIONES

