



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.

The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.


The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

#### ELEKTRISCHE EIGENSCHAFTEN

#### - Funktionelle Eigenschaften

Schutzschalter	Drehschalter	Version	Fon Verteiler
Bemessungsstrom (A)	32	Anzahl TE EN 50022	4
Anz. Pole	2P	Einstell- bereich	87 - 145 mm
Strom in AC21A (415V)	32	Typ	Für Notfall
Strom AC22A (415V)	32	Farbe Griff	Rot
Strom AC23A (415V)	32	Abschließbar	JA (max. 3 in EIN und AUS)
Verlustleistung pro Pol	0,97 W/Pol	<b>ZUBEHÖR</b>	-
Kabel- querschnitt	1-10 mm <sup>2</sup>	Art des Zubehörs	Max. 2 Hilfskontakte (1 pro Seite)

### Abmessungen

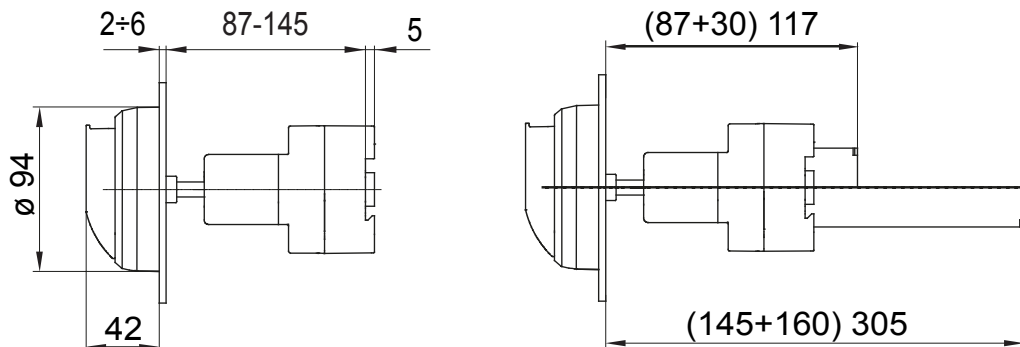

### Normen / Richtlinien

