



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

CARACTERÍSTICAS ELÉCTRICAS

Interruptor	Interruptor rotativo	- Características funcionales	-
Corriente nominal (A)	63	Nº mod. EN 50022	De cuadro
Nº polos	3P	Campo de regulación	5
Corriente en AC21A (415V)	63	Tipología	114 - 177 mm
Corriente en AC22A (415V) (A)	63	Color maneta	Para emergencia
Corriente en AC23A (415V) (A)	63	Bloqueable	Rojo
Potencia disipada por polo	2,58 W/polo	ACCESORIOS	SI (máx. 3 candados en OFF)
Sección cables	2,5-25 mm²	Tipo accesorios	Máx. 2 contactos auxiliares (1 por lado)

DIMENSIONAL

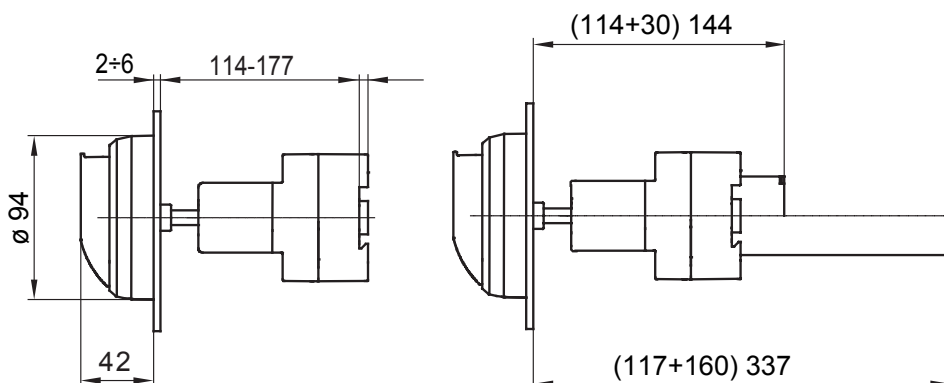

MARCAS/APROBACIONES

