
Product Data Sheet
GW70007
70 RT HP Range



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.
DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.
The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.
The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

ELECTRICAL CHARACTERISTICS	-	**FUNCTIONAL CHARACTERISTICS**	-
Circuit breaker	Rotary isolator	Version	For board
Rated current (A)	63	No. of modules EN 50022	5
No. of poles	3P	Adjustment range	114 - 177 mm
Rated operational current AC-21A (415 V) (A)	63	Type	For emergency
Rated operational current AC-22A (415 V) (A)	63	Knob colour	Red
Rated operational current AC-23A (415 V) (A)	63	Lockable	YES (max. 3 locks in OFF)
Power dissipation per pole	2.58 W/pole	**ACCESSORIES**	-
Cable section	2.5-25 mm²	Type of accessory	Max. 2 auxiliary contacts (1 per side)

DIMENSIONAL

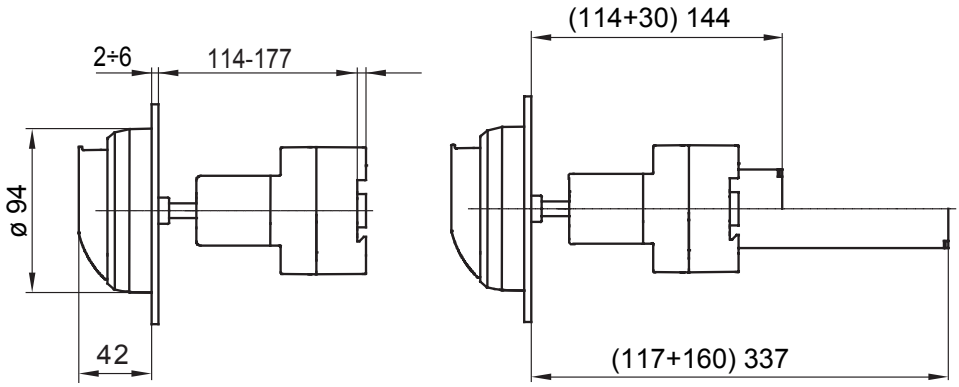

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice