Product Data Sheet

GW76901

GW FIT Range




Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

IP degree	IP68 (at 10 bar)	Material	Nickel-plated brass
For cables Ø (mm)	from 3 to 6.5	Description	Cable gland
Type of pitch	PG7	Mounting hole Ø (mm)	12.5
Area	1 (G) - 20 (D)	Electrocod	230
Ambient temperature	-60 °C <= Ta <= +95 °C	Standard	EN 50262 - IEC 62444 - EN 60079-0 - EN60079-7 - EN 60079-31 - EN 60079-7 - EN 60079-31 - DIN 40430
Installation temperature	-20 +95 °C	ATEX Classification	2G 1D Ex e II tD A20 IP68

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

DIMENSIONAL

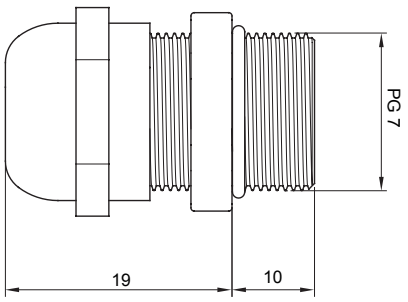

TECHNICAL SYMBOLOGY

IP

IP68 (at 10 bar)

INSTALLATION

-20°C min

+95°C max

-20 +95 °C

STANDARDS/APPROVALS

CE

Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice