




Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

IP degree	IP68 (at 10 bar)	Material	Nickel-plated brass
For cables Ø (mm)	from 14 to 18	Description	Cable gland
Type of pitch	M25	Mounting hole Ø (mm)	25
Area	1 (G) - 20 (D)	Electrocod	230
Ambient temperature	-60 °C ≤ Ta ≤ +95 °C	Standard	EN 50262 - IEC 62444 - EN 60079-0 - EN60079-7 - EN 60079-31 - EN 60079-7 - EN 60079-31 - IEC/EN 600243
Installation temperature	-20 +95 °C	ATEX Classification	2G 1D Ex e II tD A20 IP68

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS


Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

#### DIMENSIONAL

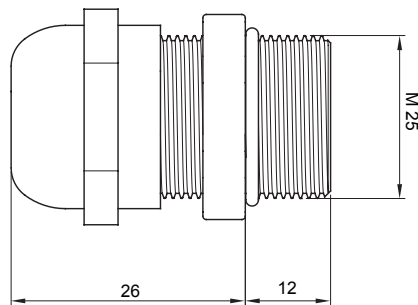

#### TECHNICAL SYMBOLOGY

IP



IP68 (at 10 bar)

-20 +95 °C

#### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and  
coordination of Polfin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 30/05/2026

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice