



Description Automatic reclosing device

Code ReStart Rd PRO 4P

Suitable for IDP RCCBs - 2P up to 80 A and 4P up to 63 A - 30 mA

Rated voltage AC 230 V

Rated current 25 - 40 - 63 - 80 - 100 A


Rated current 0 A

No. modules 3

Standard IEC EN 63024

| | | | |
|---|----------------------------------|---|--|
| Rated frequency (Hz) | 50 Hz | Distribution system | TT - TN-S |
| Rated non-operating resistance between live parts and earth (Rdo) | 8 kΩ | Insulation voltage (Ui) | 500 V |
| Rated operating resistance between live parts and earth (Rd) | 16 kΩ | Rated impulse withstand voltage (Uimp) | 4 kV |
| Maximum operating frequency | 30 oper./h | Overvoltage category | III |
| Mechanical endurance | 4000 | Dielectric strength test voltage between pole and earth | 2500 V ac for 1 minute |
| Type of residual current protection | AC - A - A[IR] - F - B | Rated residual operating current | 30 mA |
| Operating temperature | -25 +60 °C | Stocking temperature | -40°C + +70°C |
| Type of contacts | Photomos (potential free) | Voltage operating | 5-230 V ac/dc |
| Current operating | 0.6 mA (min)-100 mA cosφ=1 (max) | Operating frequency | 50 Hz |
| Use category | AC12 | Operating modes | NO/NC/NO with handle position signalling function |
| Rated tightening torque | 0,4 Nm | Terminal section | ≤ 2,5 mm² |
| Automatic reclosure for untimely tripping | Yes | Earth failure test | Yes |
| Continuous system monitoring | Yes | Completeable with | GWD0951 Auxiliary contact - GW90992 RS485 BUS Module |
| Number of poles | 2P/4P | Electrocod | 1414 |

DIMENSIONAL

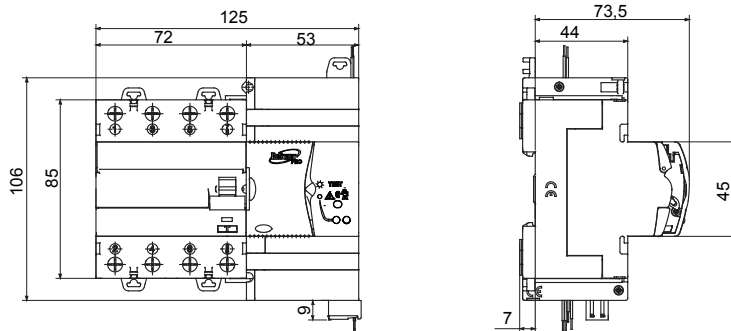

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 14/06/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice