Product Data Sheet

GW90969


ReStart Range



Description	Automatic reclosing device
Code	ReStart Rd PRO 4P
Suitable for	IDP RCCBs - 2P/4P up to 63 A - 100/300/500 mA
Rated voltage	AC 230 V
Rated current	25 - 40 - 63 - 80 - 100 A
Rated current	0 A
No. modules	3
Standard	IEC EN 63024

Rated frequency (Hz)	50 Hz	Distribution system	TT - TN-S
Rated non-operating resistance between live parts and earth (Rdo)	2.5 kΩ	Insulation voltage (Ui)	500 V
Rated operating resistance between live parts and earth (Rd)	5 kΩ	Rated impulse withstand voltage (Uimp)	4 kV
Maximum operating frequency	30 oper./h	Overvoltage category	III
Mechanical endurance	4000	Dielectric strength test voltage between pole and earth	2500 V ac for 1 minute
Type of residual current protection	AC - A - A[IR] - A[S] - F - B	Rated residual operating current	100/300/500 mA
Operating temperature	-25 +60 °C	Stocking temperature	-40°C ÷ +70°C
Type of contacts	Photomos (potential free)	Voltage operating	5-230 V ac/dc
Current operating	0.6 mA (min)-100 mA cosφ=1 (max)	Operating frequency	50 Hz
Use category	AC12	Operating modes	NO/NC/NO with handle position signalling function
Rated tightening torque	0.4 Nm	Terminal section	≤ 2.5 mm²
Automatic reclosure for untimely tripping	Yes	Earth failure test	Yes
Continuous system monitoring	Yes	Completeable with	GWD0951 Auxiliary contact - GW90992 RS485 BUS Module
Number of poles	2P/4P	Electrocod	1414

DIMENSIONAL

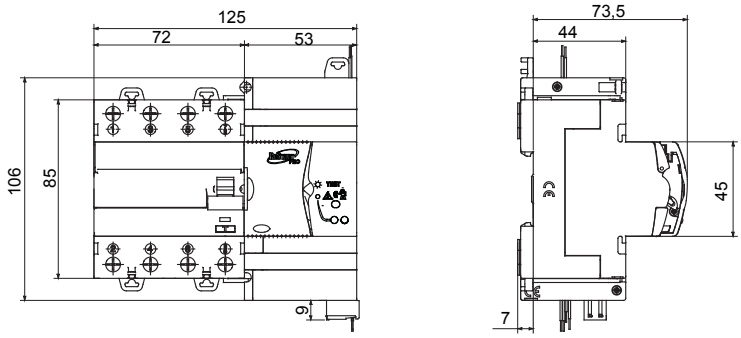

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice