



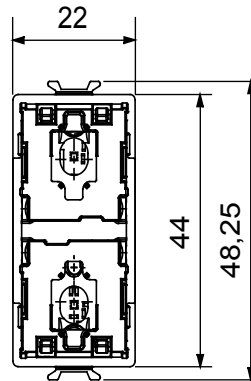

Wireless connected device with Zigbee protocol from the ChoruSmart system that can be with Home Gateway for "CONNECTED SMART HOME" solutions, for residential and small offices, both for new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node in the network ensures reachability across all devices (mesh network).

Power supply	100 ÷ 240 V ac - 50/60 Hz	Power	4-150 W 240 V ac
No. modules	1	No. output channels	1
Radio connections	Zigbee (IEEE 802.15.4)	Standard	2014/53/EU, 2011/65/EU + 2015/863, EN 60669-2-1, EN 60669-1, EN 301 489-1, EN 301 489-17, EN 300 328, EN IEC 63000
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 93%
Dispersible max power (W)	5,7	Wiring terminals	With screw
Terminal tightening capacity stranded cables (mm ²)	Max. 1,5	Terminal tightening capacity solid cables (mm ²)	Max. 1,5
Category	Dimmers	No. input channels	2 (for local command replication or sending additional Zigbee commands)
Input voltage	Mains supply voltage	IP degree	IP20 (with button key)
240 V ac Incandescent-halogen lamps	4-150 W	240 V ac LED lamps	4-150 W (max 10 lamps)
Loads piloted from electronic transf. 240 V ac	4-150 VA	LED colour	Blue
Local control	Via 2 front push buttons (to complete with button key)	Zigbee control extension if installed in a Zigbee Gateway (Sub-VA with front push buttons)	Yes/No
Load control	Trailing edge		

DIMENSIONAL

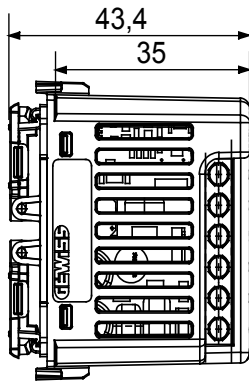

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS

