# Product Data Sheet

# GWA1241


## Connected SMART HOME



Wireless connected device with Zigbee protocol from the ChoruSmart system that can be with Home Gateway for “CONNECTED SMART HOME” solutions, for residential and small offices, both for new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node in the network ensures reachability across all devices (mesh network).

| | | | |
|---|---|---|---|
| Power supply | 100 ÷ 240 V ac - 50/60 Hz | No. of channels | 2 |
| No. modules | 1 | Radio connections | Zigbee (IEEE 802.15.4) |
| Standard | - | Working temperature | -5 ÷ +45 °C |
| Relative humidity (non-condensative) | Max 93% | Power output Zigbee | 10 dBm |
| Wiring terminals | With screw | Terminal tightening capacity stranded cables (mm²) | Max. 1.5 |
| Terminal tightening capacity solid cables (mm²) | Max. 1.5 | Category | 2-channel push-button control panel |
| No. input channels | 2 (for local command replication or sending additional Zigbee commands) | Input voltage | Mains supply voltage |
| IP degree | IP20 (with button key) | LED colour | Blue |
| Local control | Via 2 front push buttons (to complete with button key) | Power supply of EGO SMART plate | Yes |
| Zigbee control extension if installed with EGO SMART plate (SHUTTER function) | Yes (2 front push buttons) | | |

## DIMENSIONAL

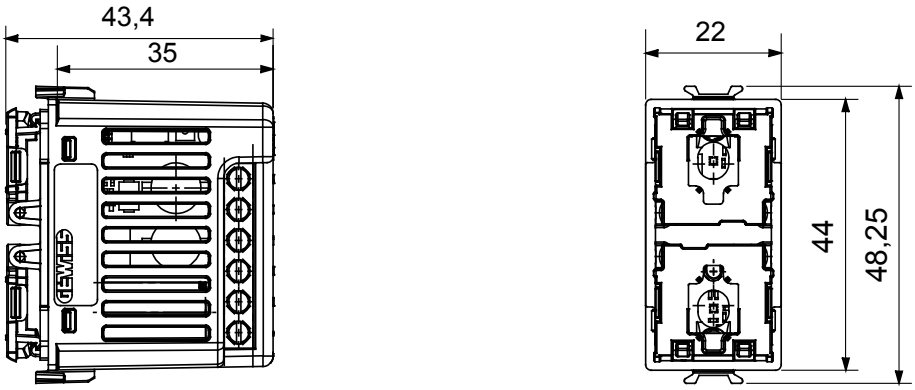


## TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

## STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice