




Type 2 socket, compliant to IEC 62196-1 and IEC 62196-2 regulations, made for IEC 618581 regulation compliant EV charging, equipped with security shutters (IPXXD protection), double drain system for water and a locking actuator that locks the plug during the charging session. Gate-valves are opened by the insertion of the plug in the socket; they are automatically closed as long as the plug is removed at the end of each charging session. This socket is equipped with three micro-contacts that check wether valves are opened or closed and wether locking actuator is engaged or not. Socket with rear cable entry.

|                                    |                                            |                                                    |                                                 |
|------------------------------------|--------------------------------------------|----------------------------------------------------|-------------------------------------------------|
| Colour                             | Black                                      | Electrical protection                              | IPXXD                                           |
| Number of poles                    | 7 (L1, L2, L3, N, PE, CP, PP)              | Mechanical resistance                              | IK10                                            |
| Rated current                      | 32 A                                       | IP degree                                          | IP55 (w/o plug inserted)                        |
| Rated voltage                      | 380-480 V (power supply) / 0-30 V (CP, PP) | Thermo-pressure with ball                          | 125°C (active parts) / 80°C (passive parts)     |
| Rated frequency (Hz)               | 50/60 Hz                                   | Glow wire test                                     | 850°C (active parts) / 960°C (external parts)   |
| <b>Locking actuator parameters</b> | -                                          | Insulation voltage (Ui)                            | 500 V                                           |
| Voltage Range                      | 9-15.5 V                                   | Stocking temperature                               | -40°C ÷ +70°C                                   |
| No load current                    | ≤ 250 mA                                   | Terminal tightening capacity stranded cables (mm²) | 2.5-16 mm² (power supply) 0.75-1.5 mm² (CP, PP) |
| Working voltage                    | 12 V                                       | Operating temperature                              | -30°C ÷ +50 °C                                  |
| Peak Current                       | 3.2 A                                      | MTTF                                               | >10.000 insertions with no load                 |
| External self-extinguishing degree | V0 (UL94)                                  |                                                    |                                                 |

### DIMENSIONAL

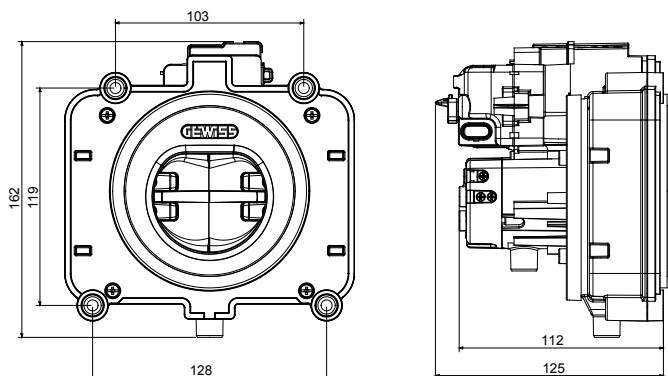

### TECHNICAL SYMBOLOGY

**IK**

IK10

**IP**

IP55 (w/o plug inserted)



125°C (active parts) / 850°C (active parts) / 80°C (passive parts) / 960°C (external parts)

**GWT**

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 24/08/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice