




Range 44 CE - Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers. The range includes versions with protection degree IP44, IP55, IP56 with smooth walls or with quick entry cable glands and different type of covers: blind / transparent, deep/plain, press-on/screw (in plastic, also 1/4 turn, or in metal). Available in different self-extinguishing materials (up to GWT 960 °C). Suitable for ordinary junctions, for special uses, and for industrial uses.

Yalıtım sınıfı	II (IEC 61140 standartlarına göre)	Renk	Gri RAL 7035
IP derecesi	IP44	Malzeme	Teknopolimer GWPLAST 75
Direnç dayanıklı	IK07	İç boyut LxHxD (mm)	80x80x40
Girişler Delik sayısı / Ø	6 / 23	panoları	Standart bağlantılar
Akkor Tel Deneyi:	650 °C	Kapak	Düz basmalı
Çalıştırma sıcaklığı	-25 +60 °C	Malzeme tipi	EN 60754-2 uyarınca halojen Free dir
Elektrokod	02210	Bilyeli termo sıcaklık	85 °C
Duvarlar	Kablo rakorlu	Yalıtım onarım aksesuarları	GW44622



### DIMENSIONAL

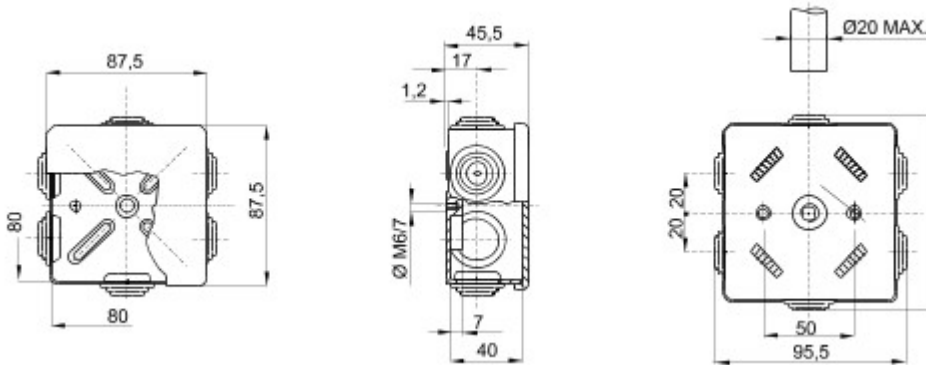

### TECHNICAL SYMBOLOGY



**IP**


IP44

**IK**

IK07


**GWT**

650 °C



**HF**

EN 60754-2 uyarınca halojen Free dir



### STANDARDS/APPROVALS

