




Range of Watertight surface-mounting boards made in polyester material reinforced with fibreglass. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP66 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor and outdoor applications.

Yalıtım sınıfı	II	Renk	Gri RAL 7035
Nominal boyut LxHxD (mm)	800x1060x350	IP derecesi	IP66
Özellikler	UV rezistans (EN 62208)	Malzeme	polyester
Direnç dayanıklı	IK10	Kilit sayısı	2
Modül sayısı EN 50022	180 (36x5)	Dağıtılabilir güç A (W)	324
Dağıtılabilir güç B (W)	226	Akkor Tel Deneyi:	960 °C
Fonksiyonel boyut LxHxD (mm)	783x1066x350	Çalıştırma sıcaklığı	-25 +60 °C
Yalıtım voltajı	1000 V	Malzeme tipi	EN 60754-2 uyarınca halojen Free dir
Elektrokod	0321	Bilyeli termo sıcaklık	200 °C
Standart	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24	Aile	46 QP
Maksimum nominal yalıtım voltajı (Ui)	690 V	Kapak tipi	Opak kapak
Sıva üstü montaj aksesuarı	GW46446-GW46451	Çifte yalıtım onarım kiti	GW46526



### DIMENSIONAL

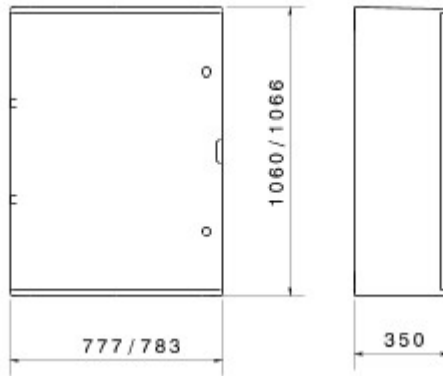

### TECHNICAL SYMBOLOGY



II

IP

IP66



EN 62208  
UV rezistans (EN  
62208)

IK

IK10

GWT

960 °C



-25 +60 °C

HF  
HALOGEN FREE

EN 60754-2 uyarınca  
halojen Free dir



200 °C

### STANDARDS/APPROVALS

