





Range of Watertight surface-mounting boards made metallic material. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP55 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor applications.

Yalıtım sınıfı	Topraklama terminalli	Renk	Gri RAL 7035
Nominal boyut LxHxD (mm)	310x425x160	IP derecesi	IP55
Malzeme	10/10'dan 15/10'a kadar çelik metal, epoksi polyeşter pudrasıyla boyalı	Direnç dayanıklı	IK10
Kilit sayısı	2	Modül sayısı EN 50022	36 (12x3)
panolar	İç ortam kullanım için	Dağıtılabilir güç A (W)	70
Dağıtılabilir güç B (W)	58	Fonksiyonel boyut LxHxD (mm)	310x425x160
Çalıştırma sıcaklığı	-25 +60 °C	Malzeme tipi	Metal
Elektrokod	0320	Standart	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24
Aile	46 QM	Maksimum nominal yalıtım voltajı (Ui)	690 V
Kapak tipi	Opak kapak		

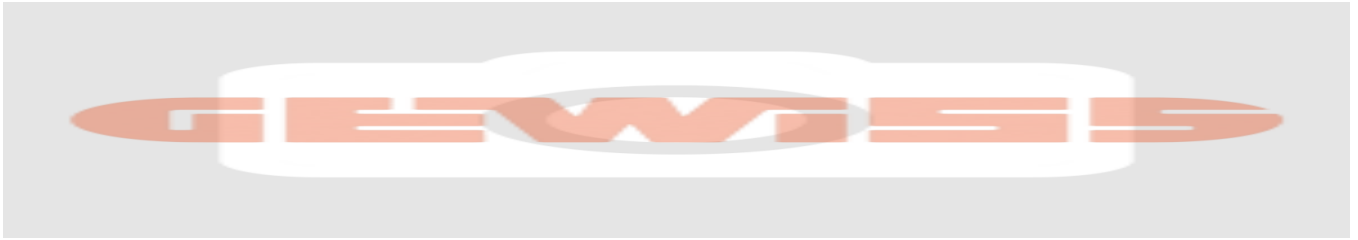

DIMENSIONAL

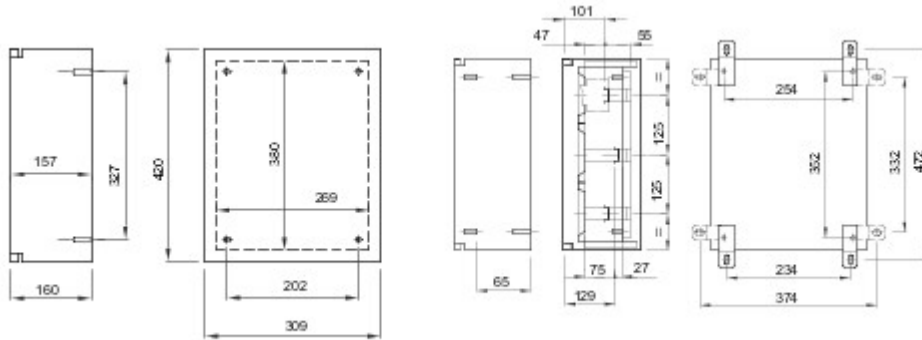

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10



STANDARDS/APPROVALS

