


The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.

Tip	Q-BOX 6 ACS	board type	Kablolu
Renk	Açık mavi	Dış boyut LxHxD (mm)	914x821x400
Ağırlık (kg)	30	Standartlarla uyum	EN 61439-4 (ASC)
Özellikler	UV rezistans (EN 62208)	IP derecesi	IP55
Direnç dayanıklı	IK10	Akkor Tel Deneyi	650 °C
Bilyeli termo sıcaklık	70 °C	Yalıtım sınıfı	II
Besleme ünitesi	Modüler dağıtıcı	Kutup adedi	3P+N+T
beslenebilir (KW) güç (kW)	33	Ana anahtar	MCB 63A 4P 6kA
MCB'S MT main RCCB	RCCB 63A 4P 0,03A - AC type	Circuits protection	MCB
Priz No.	6	Priz 2P+E 16A - IB	2
Priz 3P+N+E 16A - IB	2	Priz 3P+N+E 32A - IB	2
Emergency push-button	Evet	Elektrokod	139



DIMENSIONAL

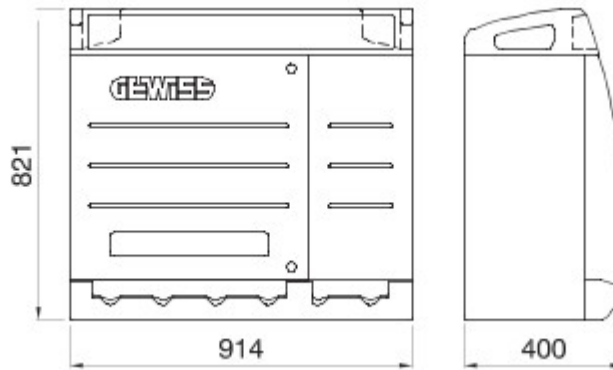


TECHNICAL SYMBOLOGY



IP
IP55

IK
IK10

GWT
650 °C



STANDARDS/APPROVALS