




70 RT HP is a new range of 16A to 160A switch disconnectors in isolating material and metal, supplied in a box. Available in control and emergency versions, the range is completed by board versions for front-panel or DIN rail assembly, in 16 to 63A options, all of which can be equipped with auxiliary contacts. These devices have been designed to deliver the ultimate in reliability, functionality and performance. They offer a technologically advanced solution that simplifies installation, reduces wiring times and ensures maximum safety and robustness, even in the most demanding conditions, thanks to the use of high-performance materials.

Versiyon	Box	Malzeme	Yalıtım
Tip	Command	Nominal akım (A)	40
Kutup sayısı	3P	Devre kesici	Rotary isolator
IP derecesi	IP66/IP67/IP69	Direnç dayanıklı	IK08
Ortam sıcaklığı	-25 +60 °C	Lid screws (no. and type)	4 insul. a 1/4 turn
Delik girişi	2 x M20/25 + 2 x M20/25	Kitlenebilir	YES (max. 3 locks in ON and OFF)
Aksesuar tipi	Max. 2 auxiliary contacts	Current in AC22 (415V)	40
Current in AC23 (415V)	40	Kablo kısmı	Max 10 mm ²
Dış boyut LxHxD (mm)	125x150x75,5	Elektrokod	1742



DIMENSIONAL

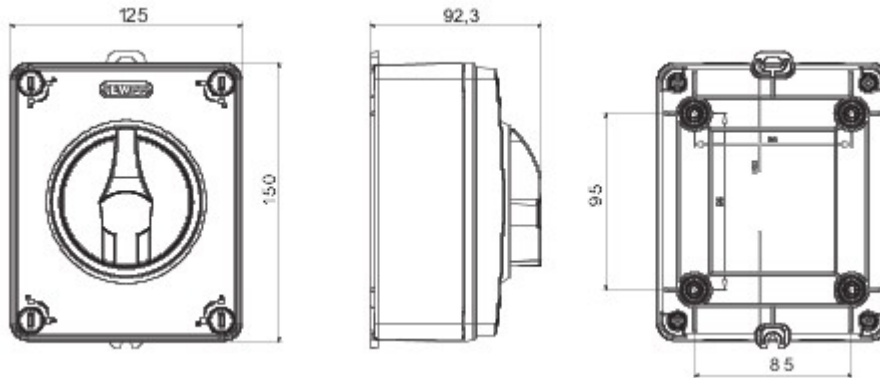

TECHNICAL SYMBOLOGY

IP **IK**

IP66/IP67/IP69

IK08

STANDARDS/APPROVALS

