




Watertight plates IP55 System range for rectangular (3 and 4 modules) flush mounting boxes. Watertight plates self-supporting for the installation of System range devices. Ergonomic membrane, opening facilitated by a comfortable handle. IP55 degree guaranteed with closed lid and watertight plate mounted on smooth and waterproof walls, without grooves.

Kategori	Sistem serisi	Tür	İtalyan standart plakaları
Grup	su geçirmez plakalar	Tanım	3 m
Renk Çerçeve	Siyah	Bitiş	Parlak
Malzeme	Teknopolimer	IP derecesi	IP55 (with closed lid)
Kapak	Zarlı	Membrane color	Şeffaf
Sıva altı montaj kutusu için	Rectangular 3 modules	için	2 screws (included)
Vida tipi	6/32 x 18mm	Screw material	Galvanizli çelik
Dahili kaide	kendi kendine yeten	Conta	Vulcanized expanded rubber
Akkor Tel Deneyi:	650 °C	Bilyeli termo sıcaklık	70 °C
Standart	EN 60669-1	Çalıştırma sıcaklığı	-25 +60 °C
UV resistance	Yes (ISO 4892-2)	Maximum opening angle lid	100°
Elektrokod	0110		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant

DIMENSIONAL

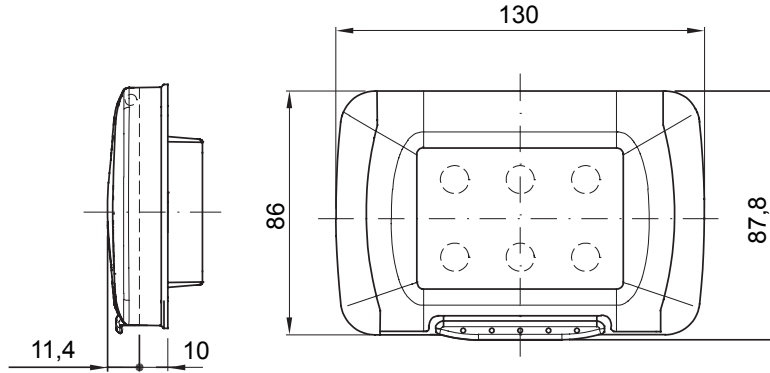


TECHNICAL SYMBOLOGY

IP

IP55 (with closed lid)

GWT

650 °C



70 °C



-25 +60 °C

STANDARDS/APPROVALS

