




Spanish standard flush mounting enclosure IP40 without door to house ICP power limiting circuit breaker. Sealable.

Insulation class	II	Colour	White RAL 9016
Rated current (A)	40	Outer dim. LxHxD (mm)	305x195x75
IP degree	IP40	Installation	Flush mounting enclosures
Mechanical resistance	IK07	Rated voltage (V)	400
R.U. 1407-D Classifications	CCE-ICP32	No. EN 50022 mod. ICP sect.	4
N. EN 50022 mod. CB section	8	Glow Wire Test	650 °C
Standard	IEC EN 60670-1; IEC EN 60670-24	Operating temperature	-15 ÷ +60°C
Insulation voltage	750 V	Electrocod	0311
Thermo-pressure with ball	70 °C	Type of knockout holes	Removable with tool
Type of enclosure	GP	Dispersible power (W)	12+25

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

DIMENSIONAL

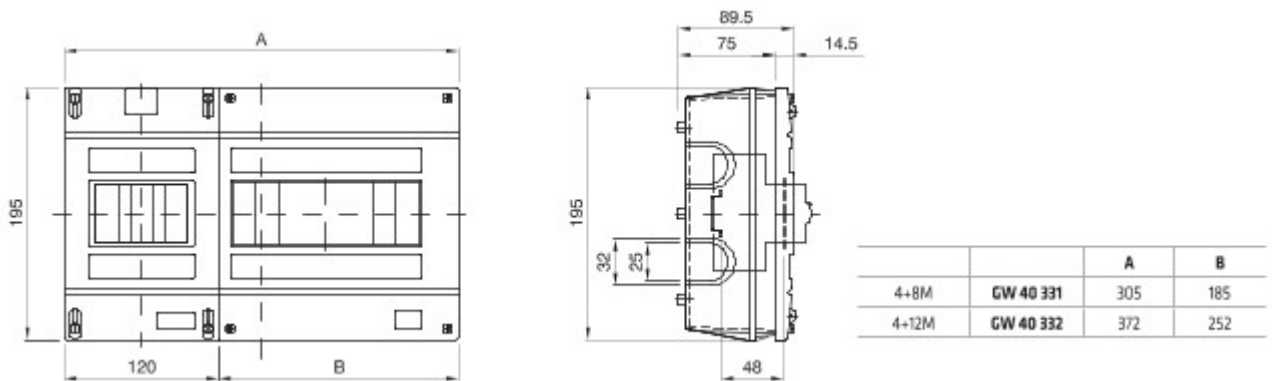

TECHNICAL SYMBOLOGY



II

IP


IP40

IK


IK07

GWT

650 °C



-15 ÷ +60°C



70 °C



Removable with tool

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 11/05/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice