




Spanish standard flush mounting enclosure IP40 without door to house ICP power limiting circuit breaker. Sealable.

Insulation class	II	Colour	Grey RAL 7035
Rated current (A)	40	Outer dim. LxHxD (mm)	120x195x76
IP degree	IP40	Installation	Wall mounting
Mechanical resistance	IK08	Rated voltage (V)	400
R.U. 1407-D Classifications	CS-ICP32	No. of modules EN 50022	4
Glow Wire Test	650 °C	Standard	IEC EN 60670-1; IEC EN 60670-24
Operating temperature	-5 +60 °C	Insulation voltage	750 V
Electrocod	0321	Thermo-pressure with ball	70 °C
Type of knockout holes	Removable with tool	Type of enclosure	GP
Dispersible power (W)	16		


#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

#### DIMENSIONAL

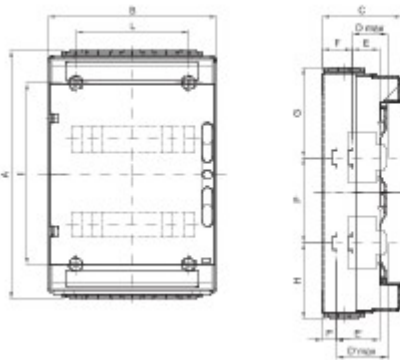

		A	B	C	D	E	F	G	H	P	D <sub>max</sub>	E'	F'	NR	I	L
11M	GW 40 111 GW 40 123	218						126.5	121.5	7					109	
20M	GW 40 116 GW 40 124	438	298	140	75	48	48	156.5	121.5	150	102	75	21	4	330	250
30M	GW 40 115 GW 40 125	558						156.5	121.5	173					404	



1	2	3	4
M16	M20	M25	M32

#### TECHNICAL SYMBOLOGY



II

IP

IP40

IK

IK08

GWT

650 °C



-5 +60 °C



70 °C



Removable with tool

#### STANDARDS/APPROVALS