




Range 44 CE - Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers. The range includes versions with protection degree IP44, IP55, IP56 with smooth walls or with quick entry cable glands and different type of covers: blind / transparent, deep/plain, press-on/screw (in plastic, also 1/4 turn, or in metal). Available in different self-extinguishing materials (up to GWT 960 °C). Suitable for ordinary junctions, for special uses, and for industrial uses.

|                           |  |                                      |                               |
|---------------------------|--|--------------------------------------|-------------------------------|
| Insulation class          | II (according to IEC 61140 standards)      | Colour                               | Grey RAL 7035                 |
| IP degree                 | IP55                                       | Material                             | Technopolymer GWPLAST 75      |
| Mechanical resistance     | IK08                                       | Internal dim. LxHxD (mm)             | 150x110x70                    |
| Max Ø holes possible      | 29 mm                                      | Lid screws (no. and type)            | 4 insul. a 1/4 turn, sealable |
| Application               | Ordinary junctions                         | Glow Wire Test                       | 650 °C                        |
| Lid                       | Plain screwed                              | Operating temperature                | -25 +60 °C                    |
| Type of material          | Halogen-free in compliance with EN 60754-2 | Electrocod                           | 02211                         |
| Thermo-pressure with ball | 85 °C                                      | Torque screws tightening             | 1.2 Newton/meter              |
| Walls                     | Smooth                                     | Accessories for insulation restoring | GW44622                       |


#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids              |           | Bases        |           | Solvents           |               |               |                    | Mineral oil        | UV rays            |
|-----------------|--------------------|-----------|--------------|-----------|--------------------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated       | Diluted   | Concentrated | Diluted   | Hexane             | Benzol        | Acetone       | Alcohol            |                    |                    |
| Resistant       | Limited resistance | Resistant | Resistant    | Resistant | Limited resistance | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

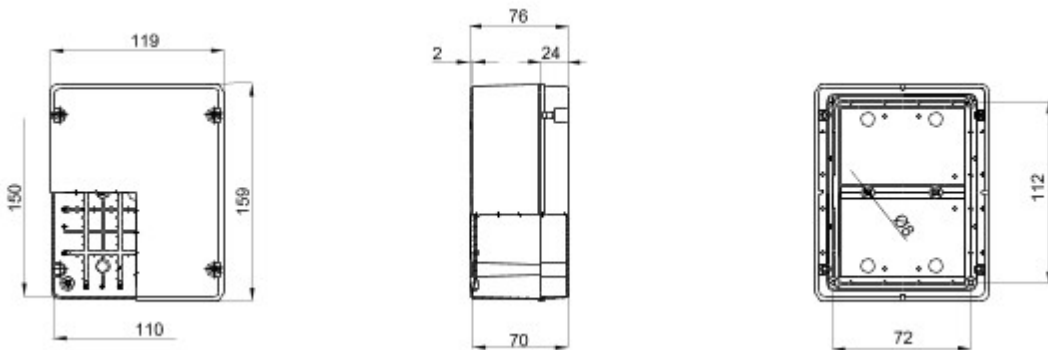


#### TECHNICAL SYMBOLOGY




**IP**  
IP55

**IK**  
IK08

**GWT**  
650 °C



**HF**  
HALOGEN FREE  
Halogen-free in compliance with EN 60754-2



#### STANDARDS/APPROVALS

