




Cable ties, made in PA66, Halogen Free. Available in 13 sizes, from 2.4x75 to 9x914mm. To complete the series are available also: heavy duty wiring ties, re-openable cable ties, cable ties with eyelet and cable ties with plate.

| | | | |
|---------------------------|-------------------------------------|---|--|
| Colour | Black | Dimensions LxH (mm) | 3.6x292 |
| Material | Polyamide 66 charged with carbonate | Tensile stress (daN) | 18 |
| Terminal grip capacity Ø | 7-75 mm | Glow Wire Test | 650 °C |
| Type | Heavy duty | Type of material | Halogen-free in compliance with EN 60754-2 |
| Electrocod | 3640 | Standard | EN 62775 |
| Fume corrosiveness | < 5% | Flame resistance in compliance with UL 94 | V2 |
| Oxygen limit index | 29% | Installation temperature | -5 +60 °C |
| Service temperature range | -40 °C +80 °C (max.peaks 135 °C) | | |

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids | | Bases | | Solvents | | | | Mineral oil | UV rays |
|-----------------|--------------------|--------------------|--------------------|-----------|-----------|-----------|-----------|---------------|-------------|-----------|
| | Concentrated | Diluted | Concentrated | Diluted | Hexane | Benzol | Acetone | Ethyl alcohol | | |
| Resistant | Limited resistance | Limited resistance | Limited resistance | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant | Resistant |

DIMENSIONAL

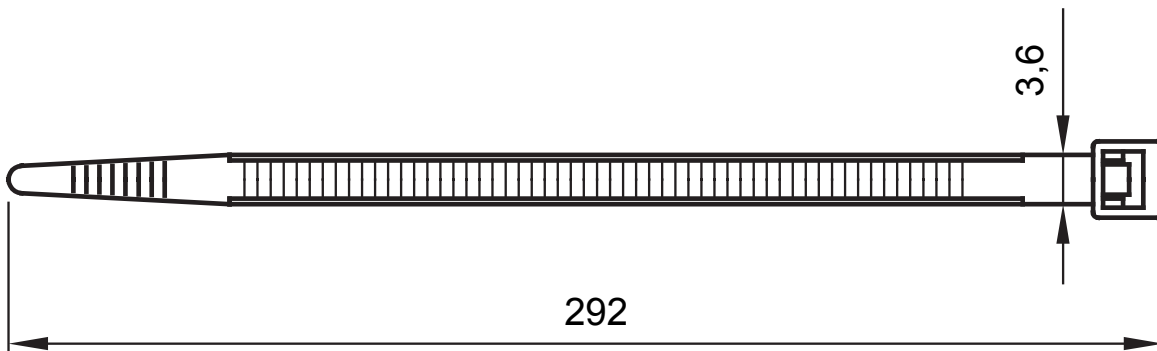

TECHNICAL SYMBOLOGY


GWT

650 °C

HF

HALOGEN FREE

Halogen-free in compliance with EN 60754-2



INSTALLATION
-5 +60 °C

STANDARDS/APPROVALS



CE