




Top entries	2xØ 23	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP65
Mechanical resistance	IK08	Side entries	2xØ 23
Houseable IB socket-outlets	16/32 A	Electrocod	2221
Minimum installation temperature	-25°C		

### DIMENSIONAL

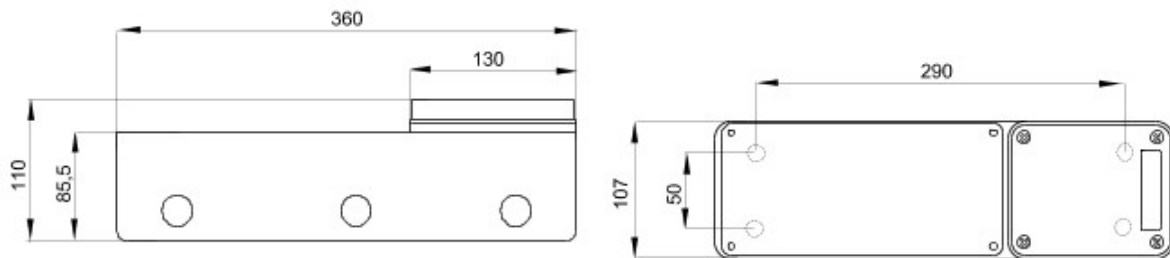

### TECHNICAL SYMBOLOGY

**GWT**    **IP**    **IK**

650 °C

IP65

IK08

### STANDARDS/APPROVALS

