




Complete system for the connection and distribution of LAN networks in residential and tertiary sector environments.

The range includes fibre optic solutions, wall panels, floor cabinets and copper wiring products.

The Data Center series provides all the products necessary to create a multi-service fibre optic infrastructure for residential buildings, in full compliance with all the indications dictated by the new CEI Guidelines 306-2 and Law 164/14.

Category	Optical connector	Cable colour	White
No. optical fibers	1	Length	10 m
Ø sheath	2 mm	For connectors	SC/APC - SC/APC
Classification	G.657.A2 / B6_a2 Bend Insensitive	Ø core	9 µm
Ø cladding	125 µm	Strength member	Kevlar
Outer jacket	LSZH Cable		Loose - OS2
Tension	60 N	Crush	100 N/10cm
Minimum bend radius (Dynamic)	20x cable diameter	Minimum bend radius (Static)	10x cable diameter
Max attenuation (@1310 nm / @1550 nm)	0.35 / 0.2 dB/Km	Working temperature	From -20°C to +60°C

### DIMENSIONAL

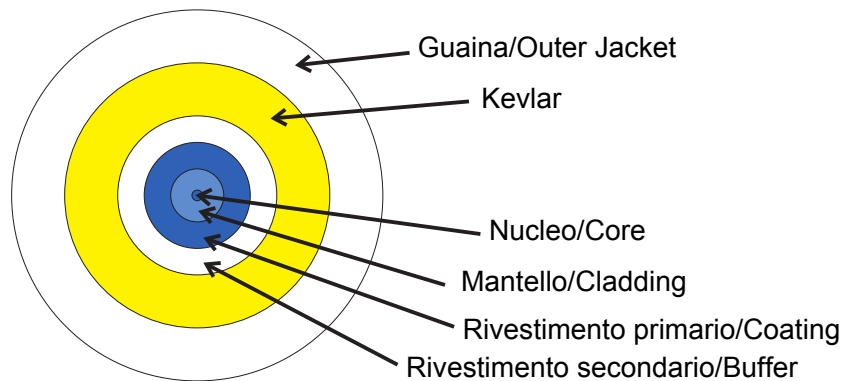

### STANDARDS/APPROVALS

