




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

| | | | |
|--------------------------------------|---|------------------------|------------------------|
| Category | Contacts interface | Communication protocol | Zigbee (IEEE 802.15.4) |
| Supply voltage | Battery powered | Power supply batteries | CR2032 replaceable |
| Output power | 8 dBm | No. input channels | 2 |
| Input voltage | Potential-free | Max cable length | 15 m |
| Standard | 2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328 | IP degree | IP20 |
| Working temperature | -5 ÷ +45 °C | Stocking temperature | -25 ÷ +70 °C |
| Relative humidity (non-condensative) | Max 93% | Dimensions LxHxD (mm) | 42x40x20 |
| Electrocod | 051A | | |

DIMENSIONAL

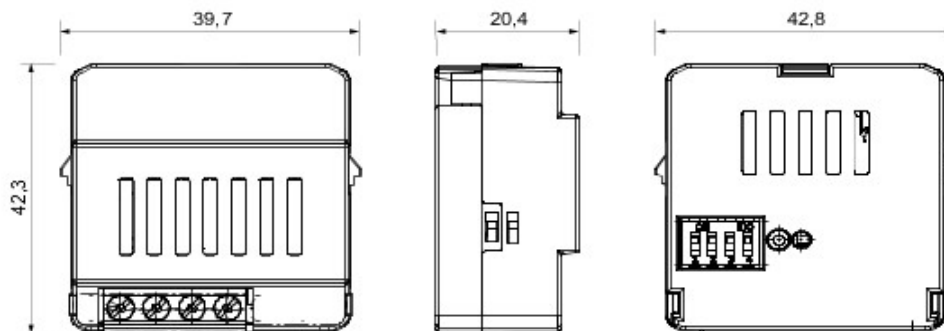

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

