




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Category	Actuator for generic loads	Communication protocol	Zigbee (IEEE 802.15.4)
Supply voltage	230V ac - 50 Hz	No. output channels	2
Output contacts	2 NO 6A (AC1) 230 V ac	Output power	8 dBm
Dispersible max power (W)	2,3 W	230V incandescent-halogen lamps	1400 W
CFL lamps	150 W	230V LED lamps	150 W
Loads controlled from toroidal transformers	450 W	Loads controlled from electronic transformers	600 W
Max power motor	500 W	Standard	2014/53/EU
IP degree	IP20	Working temperature	-5 ÷ +45 °C
Stocking temperature	-25 ÷ +70 °C	Relative humidity (non-condensative)	Max 93%
Dimensions LxHxD (mm)	42x40x20	Electrocod	051A

### DIMENSIONAL

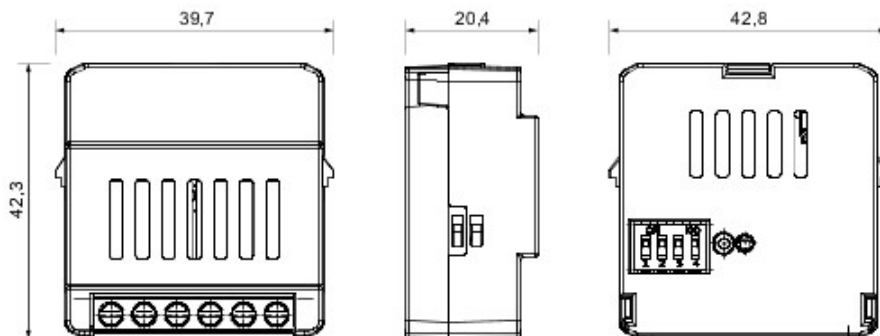

### TECHNICAL SYMBOLOGY

**IP**

IP20

### STANDARDS/APPROVALS

