


### ASTRID 75 range




Led decorative recessed luminaire with die-cast aluminum body and adjustable polycarbonate shield, available in white, aluminum, gold and bronze version. Installable on panels with a minimum thickness of 5mm and a maximum of 20mm. Suitable for indoor installation, built-in power supply, IP20 protection degree and good impact resistance.

Application	Internal	Mechanical resistance	IK06
Voltage	220/240 V - 50/60 Hz	System power	11.5 W
Weight (kg)	0.5	Lamp	LED
Colour	Aluminium	Nominal flux (lm)	1400
Lumen output (lm)	1100	IP degree	IP20
Insulation class	II	Driver type	Constant Current Driver Led
Warranty	2 years	No. of lamps	1
Colour temperature	3000 K (CRI>80)	Type of light source	LED - Not replaceable
Efficiency class of integrated LEDs	A ÷ A++	Electrocod	2419
LED Life Time (L80B10)	45000 h		

### DIMENSIONAL

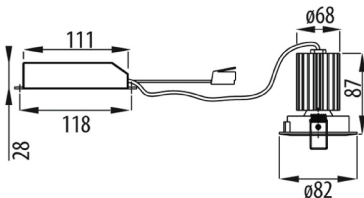

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IK

IK06



IP

IP20



CONSTANT  
CURRENT  
DRIVER

### STANDARDS/APPROVALS

