



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

| | | | |
|----------------------------------------------|------------------------|------------------------------|------------|
| Application | Indoor / Outdoor | Version | Emergency |
| Voltage | 220-240 V - 50/60 Hz | Insulation class | I |
| Colour | Graphite grey | IP degree | IP55 |
| Mechanical resistance | IK09 | Glow Wire Test | 850 °C |
| Minimum distance from the illuminated object | 1 m | Operating temperature | -25 +25 °C |
| Efficiency class of compatible lamps | A | Lamp power | 26-32 W |
| Driver type | EVG electronic reactor | Lamp holder | GX24q-3 |
| Lamp | FSM | Autonomy | 1 h |
| Accumulator type | Nickel-Cadmium | Luminous flux in emerg. [lm] | 135 / 90 |
| Weight (kg) | 2.8 | Electrocod | 2415 |

DIMENSIONAL

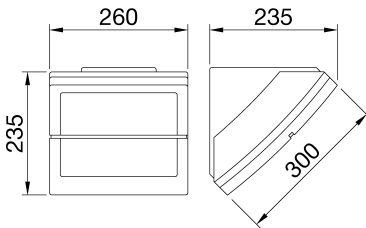

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IP55

IK

IK09

GWT

850 °C



1 m



STANDARDS/APPROVALS

