



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	LED
Voltage	220/240 V - 50/60 Hz - Stand alone	Insulation class	I
Colour	BlueGreen	IP degree	IP55
Mechanical resistance	IK09	Glow Wire Test	850 °C
Minimum distance from the illuminated object	1 m	Operating temperature	-25 +25 °C
Nominal flux (lm)	1100	Lamp	LED
System power	13 W	Colour temperature	3000 K (CRI>80)
Lumen output (lm)	950	Efficiency class of integrated LEDs	A ÷ A++
Type of light source	LED - Not replaceable	Weight (kg)	2
Warranty	Can be extended	Electrocod	2424
LED Life Time (L70B50)	50000 h		

### DIMENSIONAL

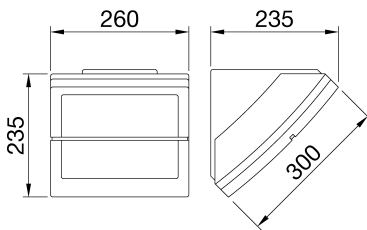

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK09

**GWT**  
850 °C



### STANDARDS/APPROVALS

