Product Data Sheet

GW40101

40 CD serie

IP65 range of watertight anclosures from 4 to 72M with smoked transparent door. The main technical features are: reversible front and back panel, removable frames and panels with windows and detechable doors with up to 180° opening and lock accessory. The enclosures can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)	Kleur	Grijs RAL 7035
Buitenafm. LxHxD (mm)	143x210x100	IP-graad	IP65
Vermogen-verspreiding (W)	13	Stoot-bestendigheid	IK09
Nominale spanning	400 V	Aantal modules EN 50022	4
Nominale stroom	125 A	Gloeidraadproef	650 °C
Bedrijfstemperatuur	-25 +60 °C	Isolatiespanning (Ui)	1000 V
Type materiaal	Halogeenvrij conform EN 60754-2	Electrocod	0321
Thermospanning met kogel	70 °C	Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Isolatie-spanning	1000 V conform EN 62208 zowel bij AC als DC		

DIMENSIONAL

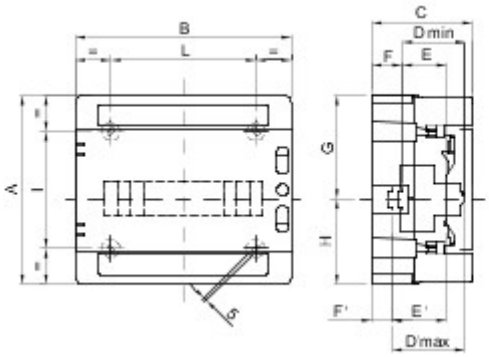

		A	B	C	D min	E	F	G	H	D'max	E'	F'	NR	I	L
4M	GW40101	210	143	100	75	48	15	105	105				3	156	67

TECHNICAL SYMBOLOGY

II (conform de norm IEC 61140)

IP

IP65

IK

IK09

GWT

650 °C

-25 +60 °C

Halogeenvrij conform EN 60754-2

70 °C

EN 62208

1000 V conform EN 62208 zowel bij AC als DC

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 19/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice