




The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.


|                             |                          |                             |                                  |
|-----------------------------|--------------------------|-----------------------------|----------------------------------|
| Type                        | Q-BOX 4 ACS              | board type                  | Wired                            |
| Colour                      | Light blue               | Outer dim. LxHxD (mm)       | 636x821x400                      |
| Weight (kg)                 | 22                       | Accordance with Standards   | EN 61439-4 (ACS)                 |
| Characteristics             | UV resistance (EN 62208) | IP degree                   | IP55                             |
| Shock resistance            | IK10                     | Glow wire test              | 650 °C                           |
| Thermo-pressure with ball   | 70 °C                    | Insulation class            | II                               |
| Power supply                | Terminal block           | No. of poles                | 3P+N+E                           |
| Power suppliable (kW)       | 17                       | Mains switch                | RCBO 32A 4P 6 kA 0,03A - AC type |
| Circuits protection         | Fuse                     | No. socket outlets          | 4                                |
| Socket-outlet 2P+E 16A - IB | 2                        | Socket-outlet 3P+E 16A - IB | 1                                |
| Socket-out 3P+E 32A - IB    | 1                        | Emergency push-button       | Yes                              |
| Electrocod                  | 139                      |                             |                                  |



### DIMENSIONAL

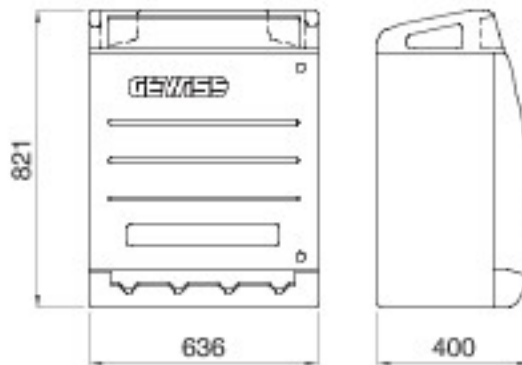

### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK10

**GWT**  
650 °C



II

### STANDARDS/APPROVALS

