


The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.


Type	Q-BOX 6 ACS	board type	Wired
Colour	Light blue	Outer dim. LxHxD (mm)	914x821x400
Weight (kg)	31	Accordance with Standards	EN 61439-4 (ACS)
Characteristics	UV resistance (EN 62208)	IP degree	IP55
Shock resistance	IK10	Glow wire test	650 °C
Thermo-pressure with ball	70 °C	Insulation class	II
Power supply	Terminal block	No. of poles	3P+N+E
Power suppliable (kW)	33	Mains switch	MCB 63A 4P 6kA
MCB'S MT main RCCB	RCCB 63A 4P 0,03A - AC type	Circuits protection	MCB
No. socket outlets	6	Socket-outlet 2P+E 16A - IB	2
Socket-outlet 3P+E 16A - IB	2	Socket-out 3P+E 32A - IB	1
Socket-outlet 3P+N+E 32A - IB	1	Emergency push-button	Yes
Electrocod	139		



### DIMENSIONAL

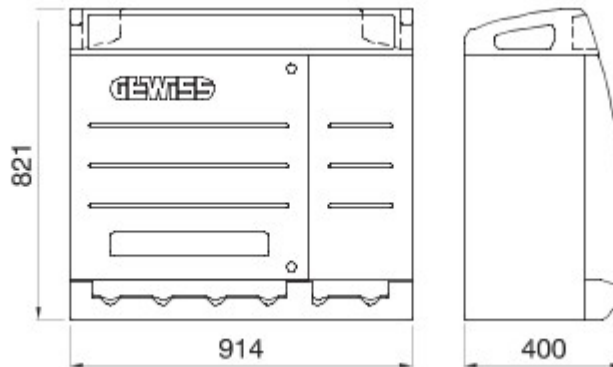


### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK10

**GWT**  
650 °C



### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 19/10/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice