




The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.


| | | | |
|------------------------------|-----------------------------|-------------------------------|------------------|
| Type | Q-BOX 6 ACS | board type | Wired |
| Colour | Light blue | Outer dim. LxHxD (mm) | 914x821x400 |
| Weight (kg) | 31 | Accordance with Standards | EN 61439-4 (ACS) |
| Characteristics | UV resistance (EN 62208) | IP degree | IP55 |
| Shock resistance | IK10 | Glow wire test | 650 °C |
| Thermo-pressure with ball | 70 °C | Insulation class | II |
| Power supply | Terminal block | No. of poles | 3P+N+E |
| Power suppliable (kW) | 33 | Mains switch | MCB 63A 4P 6kA |
| MCB'S MT main RCCB | RCCB 63A 4P 0,03A - AC type | Circuits protection | Fuse |
| No. socket outlets | 6 | Socket-outlet 2P+E 16A - IB | 2 |
| Socket-outlet 3P+E 16A - IB | 2 | Socket-outlet 3P+N+E 32A - IB | 1 |
| 3P+E 63A socket-outlets - IB | 1 | Emergency push-button | Yes |
| Electrocod | 139 | | |



DIMENSIONAL

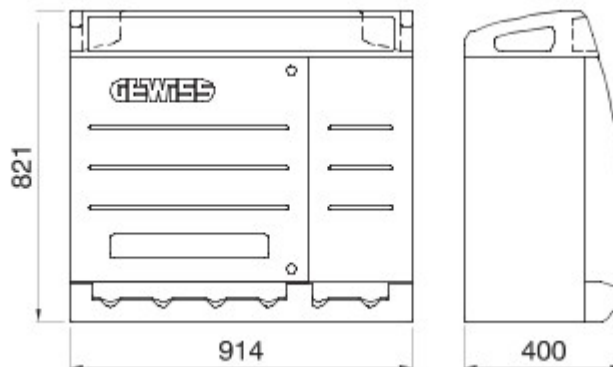

TECHNICAL SYMBOLOGY



IP
IP55

IK
IK10

GWT
650 °C



STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 24/10/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice