



LED industrial lighting fixture made in EN 46100 die cast aluminum with anti corrosive treatment and painted polyester powder. Optic system composed by reflector made in PC UV stabilized. Breathing and anti-condensation device. Suspension fixing system integrated. Watertight push-in connector for 1.5 mm<sup>2</sup> cables. Electronic LED driver with power phase correction.

Uitvoeringen	4000 K natuurlijk licht	Gewicht (kg)	11.2
Optiek	90°	System vermogen	210 W
Lumen- vermogen (lm)	23600	Kleur temperatuur	4000 K (CRI>80)
Nominale stroom (lm)	29000	Toepassing	Binnenshuis / buitenshuis
Stoot- bestendigheid	IK08	Bedrijfstemperatuur	-30 +50 °C
Kleur	Grey RAL 9006	Lamp-	Led - niet vervangbaar
Type driver	Driver Led Dali	LED stroom	0.9 A
Serie	ESALITE HB - 24K	IP- graad	IP66
Isolatie- klasse	I	Spanning	220/240 V - 50/60 Hz
Efficiëntieklasse van geïntegreerde leds	A + A++	Garantie	5 jaar
Life time L90B10 (Tq 25°)	100000 u	Overvoltage resistance	Common mode: 8KV; Differential mode: 6KV
Life time L90B10 (Tq 50°)	44000 u	Type plaat	Getemperd glas
Electrocod	2444		

### DIMENSIONAL

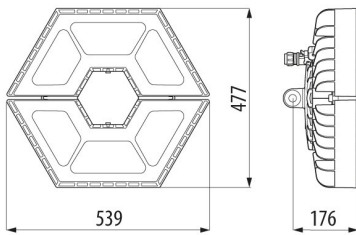

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IK**  
IK08

**IP**  
IP66



### STANDARDS/APPROVALS



Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice - Last update 17/10/2019