




Wi-Fi communication interface module (GW90945) must be coupled on the right side of ReStart PRO 4P. Thanks to Wi-Fi ReStart APP, you can monitor the system status in real time and everywhere.

Omschrijving	Interfacemodule wifi	Code	90 ReStart range
Aantal modules EN 50022	1	Geschikt voor	ReStart Rd PRO 4P /ReStart Rm PRO 4P
Nominale frequentie (Hz)	50	Nominale spanning	230/240 V a.c.
Max. vermogens- verbruik	1,6 W	Bedrijfstemperatuur	-25 +60 °C
Nominale stoot- houdspanning	4 kV	Nominaal aandraaimoment	0,4 Nm
Opslagtemperatuur	-40 +70 °C	Nominale isolatie- spanning (Ui)	500 V
Standaard	EN 301489-1; EN 301489-17	Distributiesysteem	TT - TN-S
Doorsnede aansluitklem	2,5 mm <sup>2</sup>	Minimum requirements of the operating system	Android 4.4 / iOS 9
Wi-Fi communication	2.4	Maximum Wi-Fi range	100m free space trasmission (towards router) - 80m free space trasmission (other directions)
Maximum measurable current	80 A	CT maximum cable section	25 mm <sup>2</sup>
Measure of electrical parameters	Nee		

### DIMENSIONAL

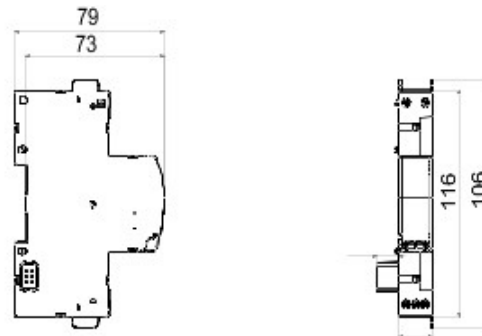

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 17/10/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice