




Description Automatic reclosing device
 Code ReStart Rd 2P
 Suitable for IDP RCCBs - 2P up to 100 A - 30 mA
 Rated voltage AC 230 V
 Rated current 25 - 40 - 63 - 80 - 100 A
 No. modules 1
 Standard EN 50557
 Rated frequency (Hz) 50 - 60 Hz

Distribution system	TT - TN-S	Rated non-operating resistance between live parts and earth (Rdo)	8kΩ
Insulation voltage	500 V	Rated operating resistance between live parts and earth (Rd)	16 kΩ
Rated impulse withstand voltage	4 kV	Maximum operating frequency	30 oper./h
Overvoltage category	III	Mechanical endurance	4000
Dielectric strength test voltage between pole and earth	2500 Vac for 1 minute	Type of residual current protection	AC - A - A[IR]
Rated residual operating current	30 mA	Operating temperature	-5 +40 °C
Stocking temperature	-40 +70 °C	Automatic reclosure for untimely tripping	Yes
Earth failure test	Yes	Continuous system monitoring	No
Electrocod	1414		

DIMENSIONAL

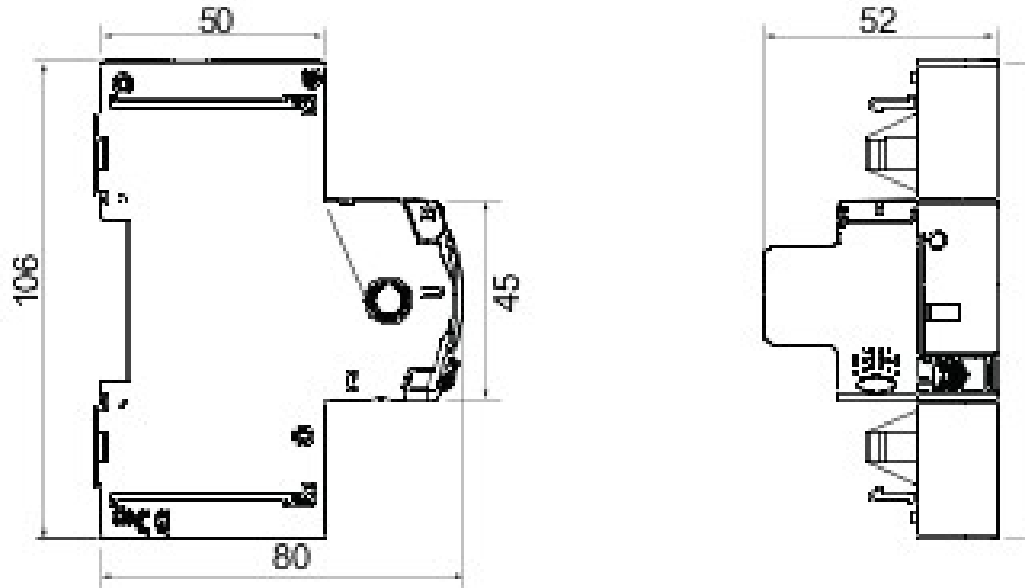

STANDARDS/APPROVALS

