





Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

Wersje	Ciepłe światło 3000K	Masa (kg)	2.8
Optyka	60°	Moc	52 W
Moc z oprawy (lm)	5900	Temperatura Barwowa	3000 K (CRI>80)
Moc ze źródła światła (lm)	6700	Zastosowanie	Wewnętrzny
Odporność na wstrząsy	IK06	Temperatura pracy	-30 +50 °C
Kolor	Szary RAL 9006	Źródło światła	Dioda LED - Niewymienna
Rodzaj napędu	Driver Led Dali	Zasilanie LED	0.6 A
Seria	ESALITE HB - 6K	Ochrona IP	IP65
Klasa Izolacji	I	Napięcie zasilające	220/240 V - 50/60 Hz
Klasa sprawności wbudowanych diod LED	A + A++	Gwarancja	5 lat
Life time L90B10 (Tq 25°)	100000 h	Overvoltage resistance	Common mode: 8KV; Differential mode: 6KV
Life time L90B10 (Tq 50°)	55000 h	Typ osłony	Plastic
Electrocod	2444		

DIMENSIONAL

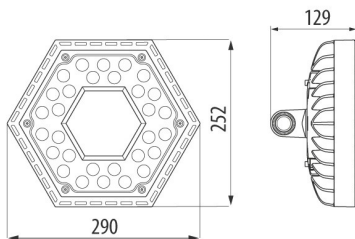

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IK

IP



IK06

IP65

STANDARDS/APPROVALS



Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice - Last update 21/10/2019