Product Data Sheet

GWS6055GD

ESALITE HB

Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

Wersje	Naturalne ?wiat?o 4000K	Masa (kg)	11.2
Optyka	Eliptyczny	Moc	210 W
Moc z oprawy (lm)	24100	Temperatura Barwowa	4000 K (CRI>80)
Moc ze ?ród?a ?wiat?a (lm)	29000	Zastosowanie	Wewn?trzny
Odporno?? na wstrz?sy	IK07	Temperatura pracy	-30°C ÷ +50 °C
Kolor	Szary RAL 9006	?ród?o ?wiat?a	Dioda LED - Niewymienna
Rodzaj nap?du	Driver Led Dali	Zasilanie LED	0.9 A
Seria	Esalite HB - 24K	Ochrona IP	IP65
Klasa Izolacji	I	Napi?cie zasilaj?ce	220-240 V - 50/60 Hz
Klasa sprawno?ci wbudowanych diod LED	A ÷ A++	Gwarancja	5 lat
?ywotno?? L90B10 (Tq 25°)	100000 h	Odporno?? na przepi?cia	Tryb wspólny: 8KV; Tryb ró?nicowy: 6KV
?ywotno?? L90B10 (Tq 50°)	44000 h	Typ os?ony	PMMA o wysokiej przezroczysto?ci
Rodzaj ?ród?a ?wiat?a	LED	Urz?dzenie z ograniczon? temperatur? powierzchni	-
?wiadectwo wg DIN 18032-3	Nie	Electrocod	2444
Mo?liwo?? wymiany ?ród?a ?wiat?a	Niewymienny	Mo?liwo?? wymiany aparatury steruj?cej	Przez profesjonalist?

DIMENSIONAL

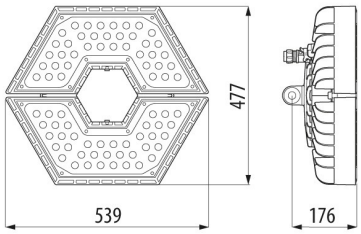

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY

IK07

IP65

STANDARDS/APPROVALS

Data, measures, designs and pictures are for information purpose only, last update 26/04/2024. They can be changed at any moment, therefore it is always ecommended to read the last updated version published on the website www.gewiss.com.Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at https://www.gewiss.com/it/en/company/landingpage/led-warranty. - 1 of 1