




Range of Watertight surface-mounting boards made stainless steel material. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 3 sizes, transparent and black door versions with IP55 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor applications, in areas that are frequently cleaned with water jets.

Classe isolamento	Predisposto com terminal de terra	Diâmetro nominal BxHxP (mm)	405x650x200
Grau de protecção	IP55	Material	Aço INOX AISI 304 de 10/10 a 15/10
Resistên. golpes	IK10	N. fechaduras	2
N. mód. EN 50022	72 (18x4)	Aplicação	Para uso interno em lugares de limpeza frequente com jatos de água
Potência dissipável A (W)	135	Potência dissipável B (W)	97
Dim. funcional BxAxP (mm)	405x650x200	Temperatura de instalação	-25 +60 °C
Tipo de material	Aço inoxidável	Código Electrocod	0320
Norma	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24	Família	46 QX
Tensão nominal máxima de emprego (Um)	690 V	Tipo de porta	Porta cega



DIMENSIONAL

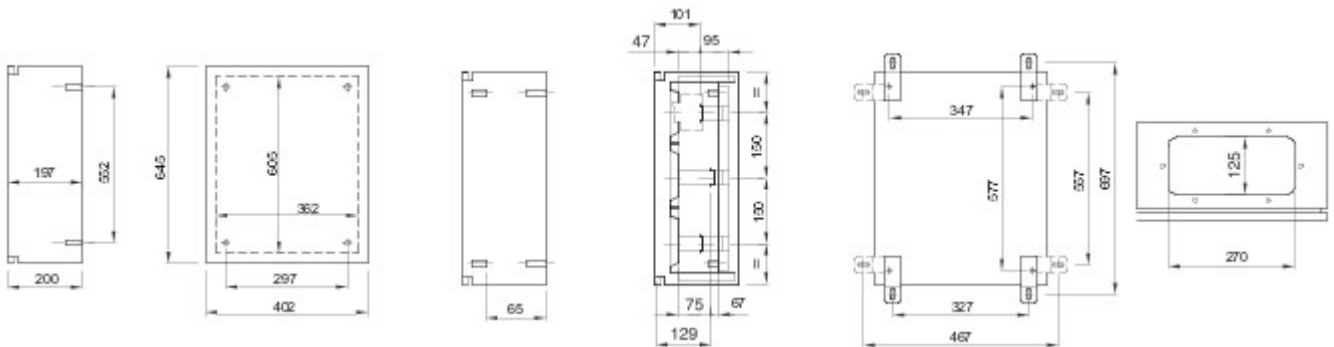


TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10



-25 +60 °C

STANDARDS/APPROVALS

