




Range of Watertight surface-mounting boards made metallic material. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP55 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor applications.

Classe isolamento	Predisposto com terminal de terra	Cor	Cinza RAL 7035
Diâmetro nominal BxHxP (mm)	800x1060x350	Grau de protecção	IP55
Material	Chapa de 10/10 a 15/10 com verniz em pó epóxi-poliéster	Resistên. golpes	IK08
N. fechaduras	2	N. mód. EN 50022	180 (36x5)
Aplicação	Para uso interno	Potência dissipável A (W)	400
Potência dissipável B (W)	284	Dim. funcional BxAxP (mm)	800x1060x350
Temperatura de instalação	-25 +60 °C	Tipo de material	Metal
Código Electrocod	0320	Norma	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24
Família	46 QM	Tensão nominal máxima de emprego (Um)	690 V
Tipo de porta	Porta com janela de vidro temperado		



DIMENSIONAL

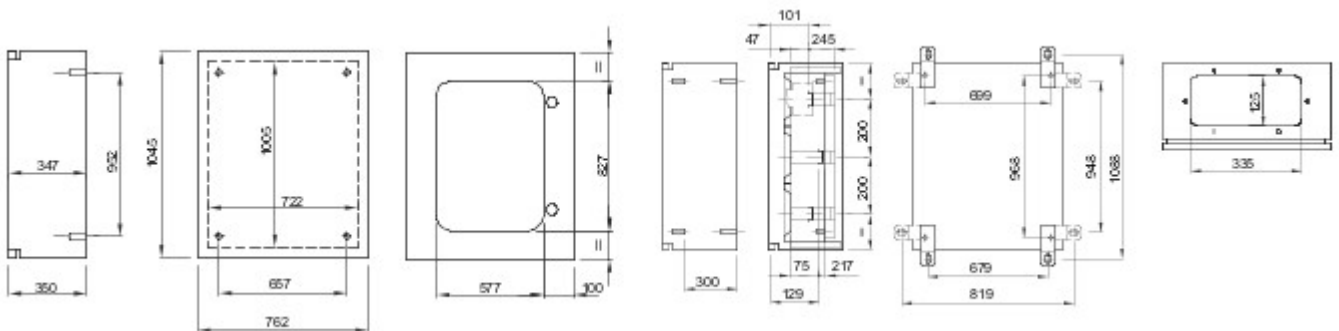

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK08



-25 +60 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 15/05/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice