





IP65 range of watertight enclosures from 4 to 72M with smoked transparent door. The main technical features are: reversible front and back panel, removable frames and panels with windows and detachable doors with up to 180° opening and lock accessory. The enclosures can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

| | | | |
|---|---|---|-------------------------------------|
| Classe isolamento | II (Norma IEC 61140) | Cor | Cinza RAL 7035 |
| Dim. externas BxHxP (mm) | 298x420x140 | Grau de protecção | IP65 |
| Potência dissipável (W) | 32 | Resistên. golpes | IK09 |
| Tensão nominal | 400 V | Cor porta | Transparente fumado |
| N. mód. EN 50022 | 24 | N. mód. EN 50022 | 24 (12X2) |
| Corrente nominal | 125 A | Glow Wire Test | 650 °C |
| Temperatura de instalação | -25 +60 °C | Tipo de material | Livre halogéneos segundo EN 60754-2 |
| Código Electrocod | 0321 | Termopressão com esfera | 70 °C |
| Acessórios para a restauração do isolamento | Screwcaps (GW44623) or fixing brackets in resin (GW44621) | Norma | EN 60670-1, IEC60670-24 |
| Tensão de isolamento | 100 V em conformidade com a norma EN 62208 tanto em CC como em CA | Nº mais blocos de terminais instaláveis | 2 x 12 módulos |



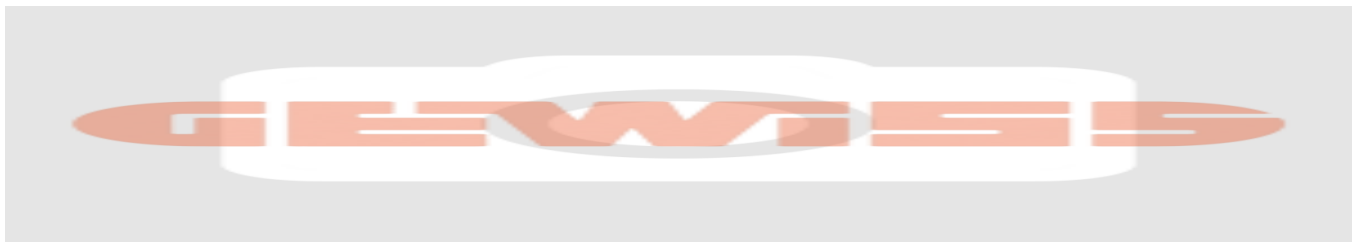


DIMENSIONAL

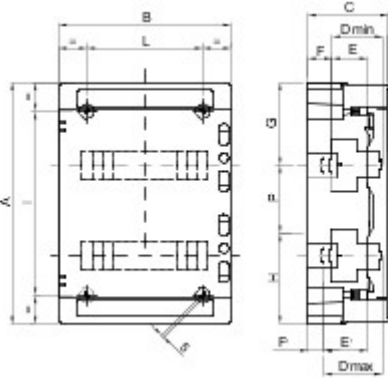

| | | A | B | C | Dmin | E | F | G | H | P | D'max | E' | F' | NR | I | L |
|-----|------------------|-----|-----|-----|------|----|----|-------|-------|------------|-------|----|----|----|-----|-----|
| 24M | GW 40 104 | 420 | 298 | 140 | 75 | 48 | 48 | 147,5 | 122,5 | 150 | 102 | 75 | 21 | 4 | 320 | 200 |
| 36M | GW 40 105 | 570 | 298 | 140 | 75 | 48 | 48 | 147,5 | 122,5 | 150 | 102 | 75 | 21 | 4 | 494 | 200 |
| | GW 40 107 | 463 | 410 | 140 | 75 | 48 | 48 | 154 | 134 | 175 | 102 | 75 | 21 | 4 | 363 | 310 |
| 54M | GW 40 108 | 655 | 410 | 140 | 75 | 48 | 48 | 162,5 | 142,5 | 175 | 102 | 75 | 21 | 6 | 293 | 319 |
| 72M | GW 40 109 | 878 | 410 | 160 | 75 | 48 | 48 | 175 | 155 | 200 175 | 102 | 75 | 21 | 6 | 394 | 319 |

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

