






Industrial-type socket-outlets conforming to IEC 309 Standard, with mechanical interlock consisting of a circuit breaker enabling the plug to be connected and disconnected only in the open position, and the switch to close only with the plug inserted. Wide range including models with rotary switch and fuseholder base, AUTOMATIKA with 6kA C characteristic miniature circuit breaker, and version with safety transformer. High application versatility thanks to the possibility of assembly in back-mounting and flush-mounting boxes, and boards of the 68 Q-DIN and Q-MC ranges.

Para fusível	Ø 22x58 mm	Tipologia	Vertical
Poder de corte fusíveis	> 50 kA	Termopressão com esfera	125 °C
Tensão nominal de isolamento (Ui)	500 V	Grau de protecção	IP67
N. pólos	3P+N+T	Resistên. golpes	IK08
Frequência	50/60 Hz	Temperatura de uso	-25 +40 °C
Protecção	Tomada porta fusível (CBF)	Com fundo	No
Código Electrocod	2222	Teste de fio incandescente	850 °C
Cor	Preto	Intensidade nominal capacidade de corte (Icc)	10 kA
Peso	Máx. 2,2 Kg	IB socket outlet rated current (In)	48 A
Tensão nominal de tensão suportada	4 kV	Corrente nominal (A)	63
Referência h	7	Tensão nominal	480 - 500 V



DIMENSIONAL

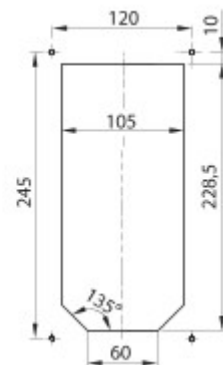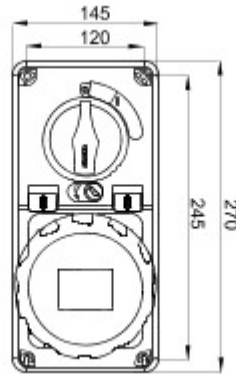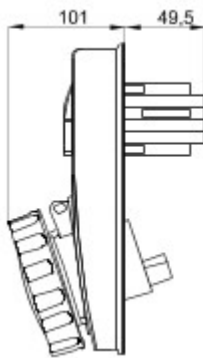

TECHNICAL SYMBOLOGY



125 °C

IP

IP67

IK

IK08



-25 +40 °C

GWT

850 °C

STANDARDS/APPROVALS

