




Flexible protected conduit system range DF DIFLEX made in thermoplastic PVC, classification 2311. In compliance with IEC 61386-1 (CEI 23/80) e IEC 61386-23 (CEI 23/83). The range includes conduit system available in 14 diameter, from 8 to 60 mm in grey, black and blue colour. Suitable for the protection of conductors in fixed or mobile installations in residential applications, and on board operating machinery in industrial applications thanks to its flexibility and resistance to mineral oils. Installation type: exposed on walls and ceilings or for applications inside false ceilings and floating floors.

Renk	Açık mavi	Malzeme	PVC
Kılıf Ø (mm)	20	Akkor Tel Deneyi:	960 °C
Elektrokod	21320	Kompresyona karşı dayanıklı	2 (Hafif- 320 N)
Darbeye karşı dayanıklı	3 (Orta - 2 J)	Bükülmeye karşı dayanıklı	4 (Esnek)
Elektriksel özellikleri	2 (Elektrik yalıtım özelliği)	Fire resistance	1 (Alev yaymayan)
Yalıtım direnci	100 MO a 500V 1 dakikada	Elektriği geçirmez	2000 V a 50 Hz 15 dakikada
Döner ve sabit borular ile , aksesuarsız katı cisimlere karşı koruma	5	Kılıflı borular ile , aksesuarsız katı cisimlere karşı koruma	6
Döner ve sabit kaplinli, sıvılara karşı koruma	4	Boru-kılıf bağlantılı, sıvılara karşı koruma	5
Çekme uzunluğu	1 (Çok hafif)	Asmalı yük kapasitesi	Uygulanamaz
Standart	EN 61386-1 EN 61386-23	Sınıflandırma	2311
Aile	Diflex		

DIMENSIONAL

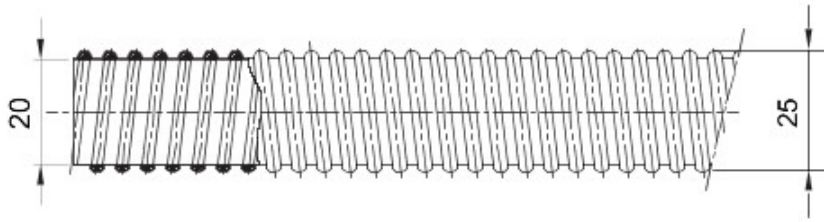

TECHNICAL SYMBOLOGY

GWT

960 °C



STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 19/11/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice